FABER EVO

AIR LAUT | 3bar | MPV 2" | PRO YEK | GARANSI TAHUN 2

EVOLUSI STANDAR

The FABER-EVO is the classic standard filter with a stronger body, the commercial MULTI-FLO XT valve for many years of reliable operation and a sand drain for easier maintenance. Unions are included.

Bobbin-wound glass fiber reinforced tank with outstanding strength and durability.

Commercial lateral system for smooth flow and reduced sand channeling.

All parts are corrosion and UV-resistant.

Maximum operation pressure 45 psi/3 bar.

Factory pressure tested at 65 psi/4,5 bar.

FABER-EVO filters can accommodate residential pools up to 190 m^3 and commercial swimming pools up to 150 m^3. Tandem installations allow for bigger volumes.

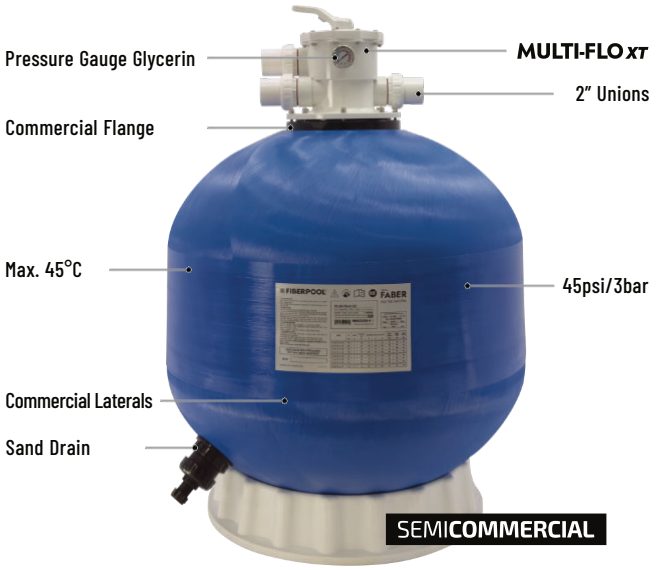

Ref.	□ mm	MPV 6-way	Area penyaringan (m^2)	Flow rate (m^3/jam) @ m^3/jam/m^2 30	40	50	Tinggi media (mm)	Pasir (kg)	Dimensi filter (mm) A	B	C	D	E	F	Berat (kg)
FB-280-T50-45-EVO	700	2"	0,38	11,4	15,2	19,0	470	225	1090	935	845	770	95	215	31
FB-320-T50-45-EVO	820	2"	0,50	15,0	20,0	25,0	540	325	1190	1035	965	890	140	215	42
FB-360-T50-45-EVO	920	2"	0,64	19,2	25,6	32,0	590	475	1290	1135	1050	990	140	215	51

	FB-280-EVO Pompa 100	Pompa 150	Pompa 150	FB-320-EVO Pompa 200	Pompa 200	Pompa 200	FB-360-EVO Pompa 300	Pompa 300
Turnover	6 jam	6 jam	6 jam	6 jam	6 jam	6 jam	6 jam	6 jam
Total Head	10 m	12 m	10 m	12 m	14 m	10 m	12 m	14 m
Pool Size	90 m^3	115 m^3	140 m^3	140 m^3	120 m^3	150 m^3	175 m^3	150 m^3

Spesifikasi	
Suhu air / Tekanan	maks. 45 °C
Tekanan maks.	45 psi / 3,0 bar
Tekanan uji	65 psi / 4,5 bar
Koneksi	2"
Filter media	Pasir silika 0,5 - 1,0 mm
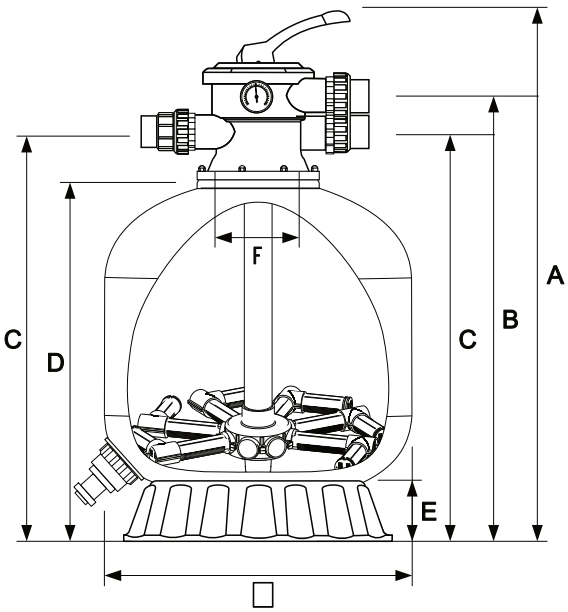
Kemasan	
FB-280-T50-45-EVO	700 x 700 x 810
FB-320-T50-45-EVO	800 x 800 x 920
FB-360-T50-45-EVO	900 x 900 x 1020