



INLET DINDING


UNIVERSAL FIT & CLASSIC DESIGN

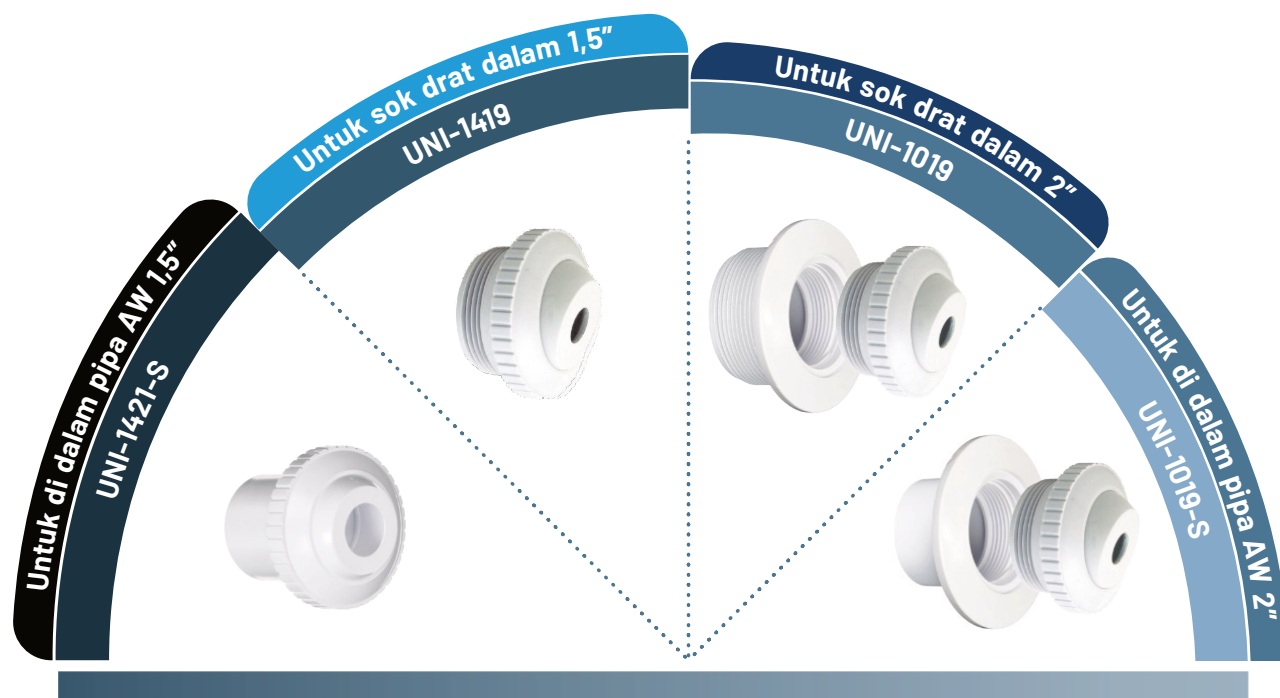


UNI-1421-S

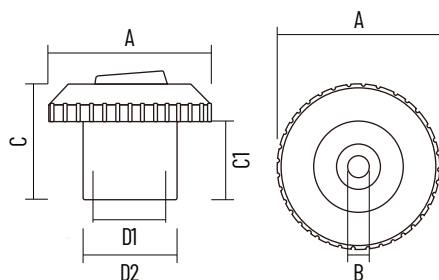

UNI-1419

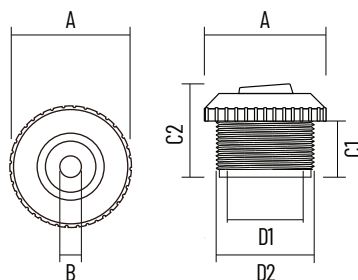

UNI-1019



Ref.	Deskripsi	Tipe Bola	Flow Rate m ³ /jam	A	B	C1	C2	D1	D2
mm									
UNI-1421-S-B	Wall inlet 1,5", spigot lem	B	2,0	80	10	44	64	32,8	42,7
UNI-1421-S-C	Wall inlet 1,5", spigot lem	C	3,5	80	15	44	64	32,8	42,7
UNI-1421-S-D	Wall inlet 1,5", spigot lem	D	5,0	80	20	44	64	32,8	42,7
UNI-1419-B	Wall inlet 1,5", drat	B	2,0	60	10	17	38	34,8	1,5"
UNI-1419-C	Wall inlet 1,5", drat	C	3,5	60	15	17	38	34,8	1,5"
UNI-1419-D	Wall inlet 1,5", drat	D	5,0	60	20	17	38	34,8	1,5"
UNI-1019-B	Wall inlet 2", drat	B	2,0	89	10	37	56	48	2"
UNI-1019-C	Wall inlet 2", drat	C	3,5	89	15	37	56	48	2"
UNI-1019-D	Wall inlet 2", drat	D	5,0	89	20	37	56	48	2"
UNI-1019-S-B	Wall inlet 2", spigot lem	B	2,0	89	10	37	56	48	55
UNI-1019-S-C	Wall inlet 2", spigot lem	C	3,5	89	15	37	56	48	55
UNI-1019-S-D	Wall inlet 2", spigot lem	D	5,0	89	20	37	56	48	55


INLET LANTAI



PRO
LINE


GARANSI
TAHUN | 2

FLOW ADJUSTABLE INLETS

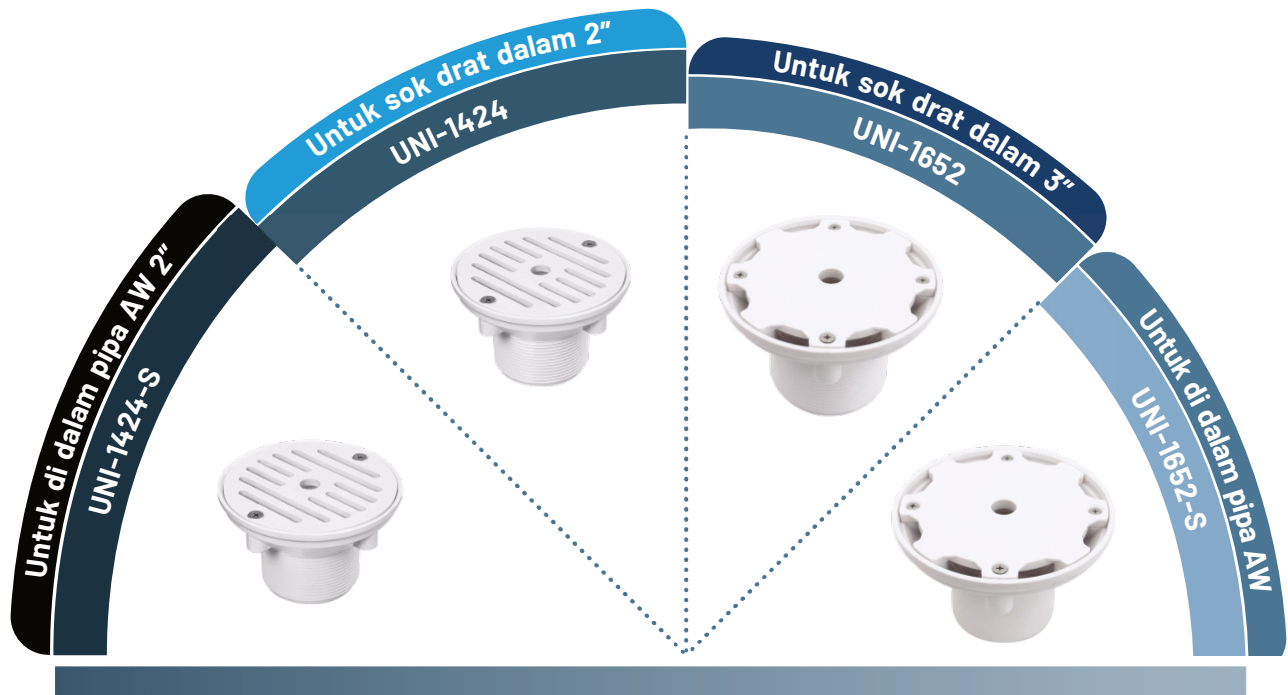

UNI-1424

UNI-1452

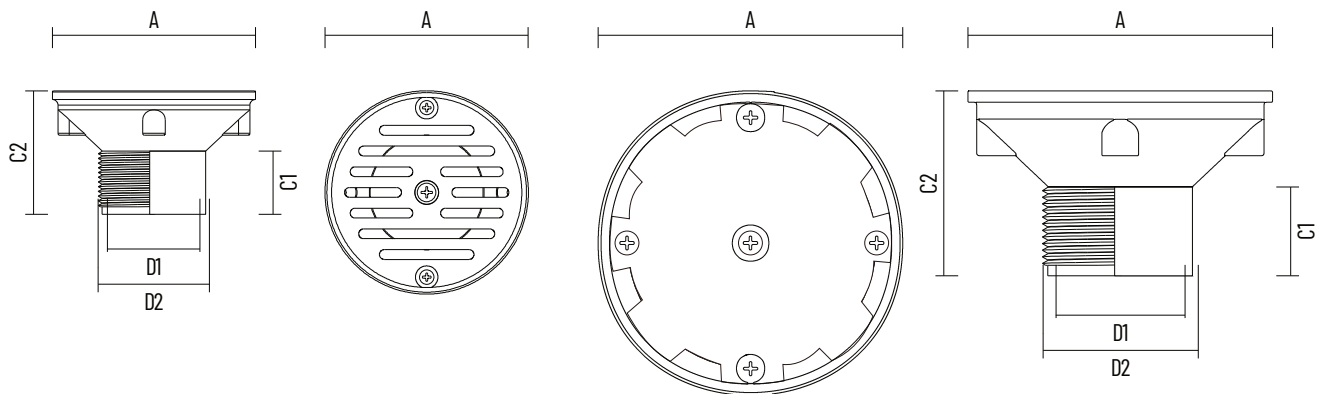

Ref.	Deskripsi	Flow Rate m ³ /jam	A	B	C1 mm	C2	D1	D2
UNI-1424-S	Floor inlet 2", spigot lem	12	108	---	37	66	48	55
UNI-1424	Floor inlet 2", drat	12	108	---	37	66	48	2"
UNI-1652	Floor inlet 3", drat	20	150	---	55	95	60	3"
UNI-1652-A	Floor inlet 2,5", socket spigot lem	20	150	---	55	95	60	89
UNI-1652-B	Floor inlet 3", pipa JIS spigot lem	20	150	---	55	95	60	82
UNI-1652-C	Floor inlet 3", pipa AW spigot lem	20	150	---	55	95	60	78